

PCT
PATENT COOPERATION TREATY

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Assistant Commissioner for Patents
United States Patent and Trademark
Office
Box PCT
Washington, D.C. 20231
ÉTATS-UNIS D'AMÉRIQUE

in its capacity as elected Office

Date of mailing (day/month/year) 03 November 1999 (03.11.99)	
International application No. PCT/GB99/01061	Applicant's or agent's file reference A25516/WO
International filing date (day/month/year) 07 April 1999 (07.04.99)	Priority date (day/month/year) 08 April 1998 (08.04.98)
Applicant HUGHES, Peter, James	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:
11 October 1999 (11.10.99)

☐ in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was
☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

<p>The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland</p> <p>Facsimile No.: (41-22) 740.14.35</p>	<p>Authorized officer Juan Cruz</p> <p>Telephone No.: (41-22) 338.83.38</p>
--	---

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference A25516/W0	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/GB 99/ 01061	International filing date (day/month/year) 07/04/1999	(Earliest) Priority Date (day/month/year) 08/04/1998
Applicant BRITISH TELECOMMUNICATIONS PUBLIC LIMITED..et.al.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item:

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing:

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☒ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

2

☐ None of the figures.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 99/01061

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04M3/36 H04M3/56 H04M9/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04M H04R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 291 470 A (SGS THOMSON MICROELECTRONICS) 17 November 1988 (1988-11-17) cited in the application column 1, line 60 - column 2, line 8 column 4, line 11 - line 15 column 2, line 53 - column 3, line 9 --- -/--	1, 10



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

26 July 1999

Date of mailing of the international search report

02/08/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Toussaint, F

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 99/01061

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>BENESTY J. ET AL: "A better understanding and an improved solution to the problems of stereophonic acoustic echo cancellation"</p> <p>IEEE INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH AND SIGNAL PROCESSING, MUNICH, GERMANY, vol. 1, 21 April 1997 (1997-04-21) - 21 April 1997 (1997-04-21), pages 303-306, XP002078596 Los Alamitos, CA, USA the whole document</p> <p>---</p>	1-10
A	<p>US 3 825 692 A (GÜELDENPFENNIG ET AL.) 23 July 1974 (1974-07-23) column 3, line 39 - line 63 column 7, line 16 - line 25</p> <p>---</p>	1, 10
A	<p>US 5 307 415 A (FOSGATE JAMES W) 26 April 1994 (1994-04-26) cited in the application the whole document</p> <p>---</p>	1, 10
A	<p>US 5 533 129 A (GEFVERT HERBERT I) 2 July 1996 (1996-07-02) cited in the application the whole document</p> <p>---</p>	1, 10
A	<p>EP 0 561 133 A (NIPPON ELECTRIC CO) 22 September 1993 (1993-09-22) the whole document</p> <p>---</p>	1, 10
A	<p>EP 0 766 446 A (NIPPON TELEGRAPH & TELEPHONE) 2 April 1997 (1997-04-02) the whole document</p> <p>-----</p>	1, 10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 99/01061

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0291470	A	17-11-1988	DE 3850446 D	04-08-1994
			DE 3850446 T	13-10-1994
			US 4907221 A	06-03-1990

US 3825692	A	23-07-1974	NONE	

US 5307415	A	26-04-1994	US 5172415 A	15-12-1992
			WO 9724012 A	03-07-1997
			AT 171035 T	15-09-1998
			AU 8097291 A	31-12-1991
			CA 2084512 A	09-12-1991
			DE 69130169 D	15-10-1998
			DE 69130169 T	15-04-1999
			EP 0533757 A	31-03-1993
			ES 2121783 T	16-12-1998
			JP 6500898 T	27-01-1994
			WO 9119407 A	12-12-1997
			US 5504819 A	02-04-1996
			US 5644640 A	01-07-1997
			US 5625696 A	29-04-1997
			US 5666424 A	09-09-1997
			US 5263087 A	16-11-1993
			US 5339363 A	16-08-1994
			US 5280528 A	18-01-1994
			US 5295189 A	15-03-1994
			US 5428687 A	27-06-1995
			EP 0875126 A	04-11-1992

US 5533129	A	02-07-1996	US 5850457 A	15-12-1998

EP 0561133	A	22-09-1993	JP 2792311 B	03-09-1998
			JP 5218906 A	27-08-1993
			CA 2088558 A,C	01-08-1993
			DE 69321635 D	26-11-1998
			DE 69321635 T	25-03-1999
			US 5371789 A	06-12-1994


EP 0766446	A	02-04-1997	CA 2186416 A	27-03-1997
			JP 9312597 A	02-12-1997
			US 5761318 A	02-06-1998



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04M 3/36, 3/56, 9/08		A1	(11) International Publication Number: WO 99/53673
			(43) International Publication Date: 21 October 1999 (21.10.99)
(21) International Application Number: PCT/GB99/01061 (22) International Filing Date: 7 April 1999 (07.04.99) (30) Priority Data: 98302763.2 8 April 1998 (08.04.98) EP 9807745.6 8 April 1998 (08.04.98) GB (71) Applicant (for all designated States except US): BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY [GB/GB]; 81 Newgate Street, London EC1A 7AJ (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): HUGHES, Peter, James [GB/GB]; 8 South Close, Melton, Woodbridge, Suffolk IP12 1QR (GB). (74) Agent: LIDBETTER, Timothy, Guy, Edwin; BT Group Legal Services, Intellectual Property Dept., 8th floor, Holborn Centre, London EC1N 2TE (GB).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: TELECONFERENCING SYSTEM

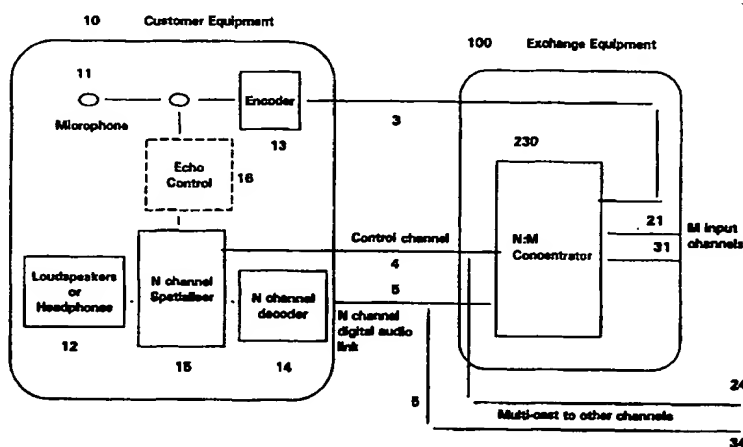

(57) Abstract

A teleconferencing system comprises a conference bridge (100) having a multichannel connection (5) to each customer equipment (10). The customer equipment (10) has means (14) to separately process each channel (51, 52, 53) to provide one output representing each of the other participants. These outputs can be combined in a spatialiser (15) to provide a spatialised output (12) in which each participant is represented by a virtual sound source. The conference bridge (100) comprises a concentrator (230), having means to identify the currently active input channels and to transmit only those active channels over the multichannel connection, together with control information identifying the transmitted channels.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

TELECONFERENCING SYSTEM

This invention relates to audio teleconferencing systems. These are systems in which three or more participants, each having a telephone connection, can participate in a multi-way discussion. The essential part of a teleconference system is called the conference "bridge", and is where the audio signals from all the participants are combined. Conference bridges presently function by receiving audio from each of the participants, appropriately mixing the audio signals, and then distributing the mixed signal to each of the participants. All signal processing is concentrated in the bridge, and the result is monaural (that is, there is a single sound channel). This arrangement is shown in Figure 1, which will be described in detail later. The principal drawback with such systems is that the audio quality is monophonic, generally poor, and it is very difficult to determine which participants are speaking at any one time, especially when the number of participants is large.

15 An example is given in European Patent Specification 0291470. This discloses an arrangement in which some of the input signals are inverted in phase before combining them in the return channel thus allowing the cancellation, for each user, of his own voice.

20 According to the invention, there is provided a teleconferencing system comprising a conference bridge having a multichannel connection to each of a plurality of terminal equipments, and at least one terminal equipment having means to separately process each channel to provide a plurality of outputs, each output representing one of the other terminal equipments. By adopting this multichannel approach, the conference environment can be tailored to the operating needs and circumstances of each individual by participants themselves.

25 Preferably the conference bridge comprises a concentrator, having means to identify the currently active input channels and to transmit only those active channels over the multichannel connection, together with control information identifying the transmitted channels. This reduces the capacity required by the multichannel connection. The control information identifying the active channels may be carried in a separate control channel, or as an overhead on the active subset of channels. In a preferred arrangement the channel representing a given terminal is excluded from the output provided to that terminal. This may be achieved by excluding that channel from the processing in the terminal equipment,

but is preferably achieved by excluding it from the multichannel transmission from the bridge to that participant, thereby reducing further the capacity required by the multichannel connection.

Exemplary embodiments of the invention will now be described, by way of example, with reference to the drawings, in which:

Figure 1 illustrates a conventional teleconference system;

Figure 2 illustrates a spatial audio teleconference system according to one embodiment of the invention;

Figure 3 illustrates a N-channel speech decoder used in the embodiment of Figure 2;

Figure 4 illustrates a N-Channel audio spatialiser used in the embodiment of Figure 2;

Figure 5 illustrates a second embodiment of the invention;

Figure 6 illustrates how the invention may be used with conventional PSTN channels;

Figure 7 illustrates a variant of the invention for use with a video conference system;

Figure 8 illustrates a voice switched concentrator which may be used in the embodiments of the invention.

Figures 9, 10, and 11 illustrate various echo cancellation techniques.

In the conventional system illustrated in Figure 1 the conference bridge located in the exchange equipment 100 receives signals from the various customers' terminal equipments 10, (20, 30 not shown) in response to sounds detected by respective microphones 11, 21, 31 etc. These signals are transmitted over the telephone network (1), to the exchange 100 at which the bridge is established. Generally the signals will travel by way of a local exchange (not shown) in which the analogue signals are converted to digital form, usually employing linear companding such as "A law" (as used for example in Europe) or "mu-Law" (as used for example in the United States of America) for onward transmission to the bridge exchange 100. On arrival at the bridge exchange 100, the bridge passes each incoming signal 11, 21, 31 through a respective digital converter 111, 112, 113 to convert them from A Law to linear digital signals, and then passes the linear signals to a digital combiner 120 to generate a combined signal. This combined signal is re-converted to A law in a further digital converter

110, and the resulting signal transmitted over the telephone network (2) to each terminal equipment 10, (20, 30) for conversion to sound in respective loudspeakers 12, 22, 32 etc. In this way the exchange equipment 100 acts as a "bridge" to allow one or more terminal equipments 30 to connect into a simple two-way connection between terminal equipments 10, 20.

The systems illustrated in Figures 2 to 8 replace the conventional conference bridge system of Figure 1 with a multicast system in which several channels can be transmitted to each participant, using a multi-channel link comprising an uplink 3, and also a downlink which comprises a control channel 4 and a digital audio downlink 5. The audio downlink comprises several channels 51, 52. Participants with suitable terminal equipment can then process these channels 51, 52 in various ways as will be described.

The transmission medium used for the uplink 3 and downlink 4,5 can be any suitable medium. ISDN (Integrated Services Data Network) technology or LAN (Local Area Network) - respectively public and private data networks - are the favoured transmission options since they provide adequate data rate and low latency - delays due to coding and transmission buffering. However, they are expensive and to date they have a low penetration in the market place. Internet Protocol (IP) techniques are becoming widely used, but currently suffer from poor latency and unreliable data rates. However, over the next few years rapid improvements are envisaged in this technology and it is likely to become the preferred telecommunication method. Such systems would be ideally suited to implementing this invention. The latest internet type modems provide 56kbit/s downstream (links 4,5:), and up to 28.8kbit/s upstream (link 3). They are low cost and are commonly included in personal computer retail packages. Ideally a system should be able to work with all of the above, and also with standard analogue PSTN for use as a backup.

The signal mixing can take place either in the user's terminal equipment, or in a centralised processing platform as is shown in Figure 2. In Figure 2 the terminal equipment 10 contains a microphone 11 and loudspeaker system 12 as before. However, the loudspeaker system 12 is a spatialised system - that is, it has two or more channels to allow sounds to appear to emanate from different directions. This may take the form of stereophonic headphones, or a more complex system such as disclosed in United States Patents 5533129 (Gefvert), 5307415

(Fosgate), article "Spatial Sound for Telepresence" by M.Hollier, D. Burraston, and A. Rimell in the British Telecom Technology Journal, October 1997 or the present applicant's own International Patent Application WO98/58523, published on 23 December 1998.

5 The output from the microphone 11 is encoded by an encoder 13 forming part of the terminal equipment 10, and transmitted over the uplink 3 to the exchange equipment 100. Here it is combined with the other input channels 21, 31 from the other participants, terminals into a concentrator 230 which combines the various inputs into an audio signal having a smaller number of channels 51, 52
10 etc. These channels are transmitted over multiple-channel digital audio links 5 to the customer equipments 10, (20, 30) where they are first decoded by respective decoders 14, 24, 34 (Figure 3) and provided to a spatialiser 15 (Figure 4) for controlling the mixing of the channels to generate a spatialised signal in the speaker equipment 12.

15 The concentrator 230 selects from the input channels 11, 21, 31 those carrying useful information - typically those carrying speech - and passes only these channels over the return link 5. This reduces the amount of information to be carried. A control channel 4 carries data identifying which channels were selected. In the terminal equipment the spatialiser 15 uses data from the control channel to
20 identify which of the original sound channels 11, 21, 31 it is receiving, and on which of the "N" channels 51, 52 in the audio link each original channel is present, and constructs a spatialised signal using that information. The spatialised signal can be tailored to the individual customer, for example the number of talkers in the spatialised system, the customer's preferences as to where in the spatialised
25 system each participant is to seem to be located, and which channels to include.

In particular, the user may exclude the channel representing his own input 11, or may select a simultaneous translation instead of the original talker.

Transmission efficiency is achieved because only the active subset N of the total number of channels M are transmitted at any one time. The subset is
30 chosen using a voice controlled dynamic channel allocation algorithm in the N:M concentrator 230. A possible implementation of this is shown in Figure 8. Each input channel 11,21,31 is monitored by a respective analyser 231, 232, 233. As shown for analyser 231, the signal is subjected to a speech detection and analysis process 231b. This detects whether speech is present on the respective input 11,

and gives a confidence value, indicative of how likely it is that the signal contains speech. This ensures that low-level background speech is given a lower weight than speech clearly addressed to the microphones 11, 21, 31 etc. A value is also given for level, to ensure speech directed to the microphone is preferred over background noise, and the level information can be passed to the spatialisation system to select a coding algorithm appropriate to the information in the speech. In order to detect and process the speech in the signals they first need to be decoded in a decoder 231a (this may be dispensed with if the speech detection system 231b can operate with digitally encoded signals).

10 A voting algorithm 234 then selects which of the inputs 11, 21, 31 have the clearest speech signals and controls a switch to direct each of the input channels 11, 21, 31 which have been selected to a respective one of the output channels 51, 52. Similar algorithms are used in Digital Circuit Multiplication Equipment (DCME) systems in international telephony circuits. Data relating the audio channels' content to the conference participants, and therefore the
15 correspondence between the input channels 11, 21, 31 and output channels 51, 52 is transmitted over the control channel 4. Alternatively, this data can be embedded in the encoded audio data.

When there are fewer talkers identified than there are available output
20 channels 51, 52, signal quality can be improved by using a less compressed digitisation scheme for those input channels selected, thereby using more than one output channel 51, 52 for each input channel selected. Telephone quality speech may be achieved at 8kbits/s, allowing eight talkers to be accommodated if the system has a 64kbit/sec capability. Should fewer talkers be detected, the 64kbit/s
25 capability may be used instead to provide four 16 kbit/s audio channels, capable of carrying 'good' quality speech, or a mixture of channels at different bit rates, to allow the coding rates to be selected according to the initial signal quality, or so that the main talker may be passed at higher quality than the other talkers. Layered coding schemes can be used to allow graceful switching between data
30 rates.

The N-channel de-multiplexer and speech decoder 14 used in the terminal equipment 10 is shown in Figure 3. This receives the channels 51, 52, 53 etc carried in the audio downlink 5 and separates them in a demultiplexer 140. Each channel 51, 52, etc is then separately decoded in a respective decoder 141, 142,

143, etc for processing by the spatialiser 15. The decoders 141, 142, etc may operate according to different processes according to the individual coding algorithms used, under the control of the control signals carried in the control channel 4.

5 A composite signal consisting of the summation of all input signals could also be transmitted. Such a signal could be used by users having monaural receiving equipment, and may also be used by the spatialiser to generate an ambient background signal. Alternatively the spatialiser 15 may replace any of the channels 11, 21, 31 not selected by the concentrator 230, and therefore not
10 represented in the N channel link 5, by "comfort noise"; that is low-level white noise, to avoid the aural impression of a void which would be occasioned by a complete absence of signal.

 The customer equipment 10 can be implemented using a desktop PC. Readily available PC sound card technology can provide the audio interface and
15 processing needed for the simpler spatialising schemes. The more advanced sound cards with built in DSP technology could be used for more advanced schemes. The spatialiser 15 can use any one of a number of established techniques for creating an artificial audio environment as detailed in the Hollier et al article already referred to.

20 Spatialisation techniques may be summarised as follows. Any of these spatialisation techniques may be used with the present invention.

 The simplest technique is "panning", where each signal is replayed with appropriate weighting via two or more loudspeakers such that it is perceived as emanating from the required direction. This is easy to implement, robust and
25 may also be used with headphones.

 "Ambisonic" systems are more complicated and employ a technique known as wavefront reconstruction to provide a realistic spatial audio percept. They can create very good spatial sound, but only for a very small listening area and are thus only appropriate for single listeners.

30 For headphone listening, "binaural" techniques can be used to provide very good spatialisation. These use head-related transfer function (HRTF) filter pairs to recreate the soundfield that would have been present at the entrance to the ear canal for a sound emanating from any position in 3D space. This can give very good spatialisation and may be extended for use with loudspeakers, when it is

known as "transaural". As with ambisonic systems, the correct listening region is very small.

The output of several spatialisers may be combined as shown in Figure 4, which shows a spatialiser group for a stereophonic output having left and right channels 12L, 12R. Each channel 51, 52, 53 is fed to a respective spatialiser 151, 152, 153 which, under the control of a coefficient selector 150 control by the signals in the control channel 4, transmits an output 151L, 151R etc to each of a series of combiners 15L, 15R. The processing used to create the outputs 151L, 151R etc is operated under the control of the control signal 4 such that each channel appears as a virtual sound source, having its own location in the space around the listener.

The positions of virtual sources in three dimensional space could be determined automatically, or by manual control, with the user selecting the preferred positioning for each virtual sound source. For a video conference the positioning can be set to correspond with the appropriate video picture window. The video images may be sent by other means, or may be static images retrieved from local storage by the individual user.

If the spatialised sound is relayed via loudspeakers 12, rather than headphones, it will be necessary to prevent signals from the loudspeakers 12 being picked up by the microphone 11, re-transmitted and being heard as an echo at the distant sites 20, 30 etc. A technique for achieving this will be described later, with reference to Figure 11.

Figure 5 shows an alternative arrangement to that of Figure 4, in which the spatialisation is computed in the conference 'bridge'. Each conference participant receives the same spatialised signals, thus simplifying the customer equipment. Figure 5 is similar in general arrangement to Figure 2, except that the decoder 14 and spatialiser 15 are part of the exchange equipment 200. The output from the spatialiser 15 is passed to an encoder 18 which transmits the required number of audio channels (e.g. two for a stereo system) to each customer 10, 20, 30. This requires the number of channels in the downlink 5 to be equal to the number of audio channels in the spatialisation systems' outputs, instead of the number selected by the concentrator (plus the control channel 4) as in the embodiment of Figure 2. It also simplifies the customer equipment 10. However, this arrangement requires all customer installations 10, 20, 30 to have similar

spatialisation systems, and in particular the same number of audio channels. It would also be more difficult to remove a talker's own voice from the signal he receives. Echo control would also be more complicated, and channel coding may degrade the spatialisation.

5 Conventional analogue connections could be included in the conference by providing each analogue connection 43, 45 to the 'bridge' 200 with an encoder 42, as shown in Figure 6, to provide an input 41 to the concentrator. The output 5 of the concentrator 230 is also decoded and combined in a unit 44 to provide a monaural conference signal 45 to the analogue user 40.

10 The invention could be applied to a conference situation in which there are several participants at each location, such as the video conference shown in Figure 7. Close microphones 11a, 11b, 11c, for example of the "tie-clip" type, are used to pick up the sound from each individual talker, and a talker location system 60 is used to keep track of their spatial position. The talker location system 60 may
15 comprise a system of microphones which can identify the positions of sound sources. Relating the position of a sound source to that of the tie clip microphone 11 currently in use makes it possible to learn the position of each talker by audio means alone. Alternatively, the system may detect the position of each user by means such as optical recognition of a badge carried by each user. In either case,
20 the position data detected by the talker location system 60 is passed to the far end (Room B), where correct spatialisation is reconstructed, for output by loudspeakers 12L, 12M, 12R etc. This would achieve a true spatial conference and overcome associated echo control problems, since the "tie clip" microphones 31a, 31b, 31c have a limited range and will not detect the outputs from the
25 loudspeakers in the same room.

 If loudspeakers are used in the embodiments of Figures 2 to 4 or of Figure 5, there is a need to control acoustic feedback ("echo") between the loudspeaker 12 and the microphone 11. Such feedback causes signals to be retransmitted back into the system, so that each user hears one or more delayed versions of each
30 signal (including his own transmissions) arriving from the other users. For a monophonic system echo control can be done using an echo canceller as shown in Figure 9. The echo signal, represented by D, is caused by the acoustic path J between the loudspeaker 12 and microphone 11 of equipment 10 in room B. Cancellation is achieved in an echo control unit 16 by using an adaptive filter to

create a synthetic model of the signal path J such that the echo D may be removed by subtraction of a cancellation signal D'. The signal returned to equipment 20 in room A is now free of echoes, containing only sounds that originated in Room B. The optimum modelling of the acoustic path J is usually
5 achieved by the adaptive filter in a manner such that some appropriate function of the signal E is driven towards zero. Echo control using adaptive filters in this manner is well known.

Multi-channel echo cancellation, as shown in Figure 10 for two channels, is more complex since there are two input channels 51, 52 and therefore two
10 loudspeakers 12L, 12R. It is therefore necessary to model two echo paths K and L for each of the two return channels 3L, 3R. (The process is only shown for return channel 3L, using microphone 11L). Correct echo cancellation is only achieved if adaptive filters 161L, 162L model the signal paths K and L respectively. (Two further filters 161R, 162R are required for the other return channel 3R) However, it
15 is not possible to find a correct model for each path K, L independently without some difficult and expensive signal processing as described in "A better understanding and an improved solution to the specific problems of stereophonic echo cancellation" (IEEE Transactions on speech and Audio processing, Vol 6, no 2 March 1998. Authors: J Benesty, D R Morgan and M M Sondhi).

20 The system described above with reference to Figure 4 employs linear artificial spatialisation techniques. Figure 11 shows how this, and the fact that the echo from each loudspeaker 12L, 12R combines linearly at each microphone 11L, (11R, not shown), allows echo cancellation to be provided for each output channel 3L, (3R) by having a separate adaptive filter 161L, 162L, 163L, (161R, 162R,
25 163R) on each input channel 51, 52, 53. Thus the adaptive filter 161L will model the combination of the spatialiser 151 for the channel 51, and the echo path between the loudspeakers 12L and 12R and the microphone 11L. This arrangement is discussed in detail in the applicant's co-pending application claiming the same priority as the present case.

CLAIMS

1. A teleconferencing system comprising a conference bridge (100) having a
5 multichannel connection (5) to each of a plurality of terminal equipments, and at least one terminal equipment (10) having means (15) to separately process each channel to provide a plurality of outputs, each output representing one of the other terminal equipments.
- 10 2. A system according to claim 1, wherein the terminal equipment (10) has spatialisation means (15), to combine the outputs representing each terminal to provide a spatialised output in which each terminal is represented by a virtual sound source.
- 15 3. A system according to claim 1 or 2, wherein the conference bridge (100) comprises a concentrator (230), having means to identify the currently active input channels (3, 21, 31), and to transmit only those active channels over the multichannel connection (5), together with control information (4) identifying the transmitted channels.
- 20 4. A system according to any preceding claim, wherein the channel representing a given terminal is excluded from the output provided to that terminal.
5. A system according to claim 4, comprising means (16) in the terminal
25 equipment for excluding the said channel from the processing.
6. A system according to claim 4, comprising means for excluding the said channel from the multichannel transmission from the bridge (100) to the respective terminal (10).
- 30 7. A system according to any preceding claim, provided with selection means whereby the use of an individual terminal can select which channel, or channels, of the plurality of channels are to be output by the user terminal.

8. A system according to any preceding claim, the terminal equipment (10) having echo cancellation means (16) comprising means for detecting correlations between the output signal from the terminal equipment and input signals carried on individual input channels to the terminal equipment, the input signals being
5 representative of other terminals, such correlations being indicative of acoustic feedback at the terminal equipment, and means for cancelling such feedback signals in the output signal.

9. A system according to claim 8, wherein the terminal equipment (10)
10 comprises, for each channel of the output signal, a plurality of adaptive filters, each adaptive filter being arranged to model the echo path between a respective input channel and the respective output channel, and for each output channel there being provided a combiner for adding the outputs of the respective plurality of adaptive filters to generate an echo cancellation signal for the respective output
15 channel.

10. A method of providing teleconferencing services to a plurality of terminal equipments, in which a multichannel connection is provided from a conference bridge (100) to each terminal equipment (10), in which at least one terminal
20 equipment processes each channel separately to provide a plurality of outputs, such output each representing a respective one of the other terminals.

11. A method according to claim 10, wherein the outputs are processed to generate a spatialised output in which each cooperating terminal is represented by
25 a virtual sound source.

12. A method according to claim 10 or 11, wherein the conference bridge (100) identifies the currently active input channels and transmits only those active channels over the multichannel connection, together with control information
30 identifying the transmitted channels.

13. A method according to claim 10, 11, 12 wherein the channel representing a given terminal is excluded from the output provided to that terminal.

14. A method according to any of claims 10 to 13, in which correlations are detected between the output signal from a given terminal equipment and input signals carried on individual input channels to the terminal equipment, the input signals being representative of other terminals, such correlations being indicative of
5 acoustic feedback at the terminal equipment, and cancelling such feedback signals in the output signal.

15. A method according to claim 14, wherein, for each channel of the output signal, an adaptive filter models the echo path between a respective input channel
10 and the respective output channel, and for each output channel the outputs of the respective plurality of adaptive filters are added to generate an echo cancellation signal for the respective output channel.

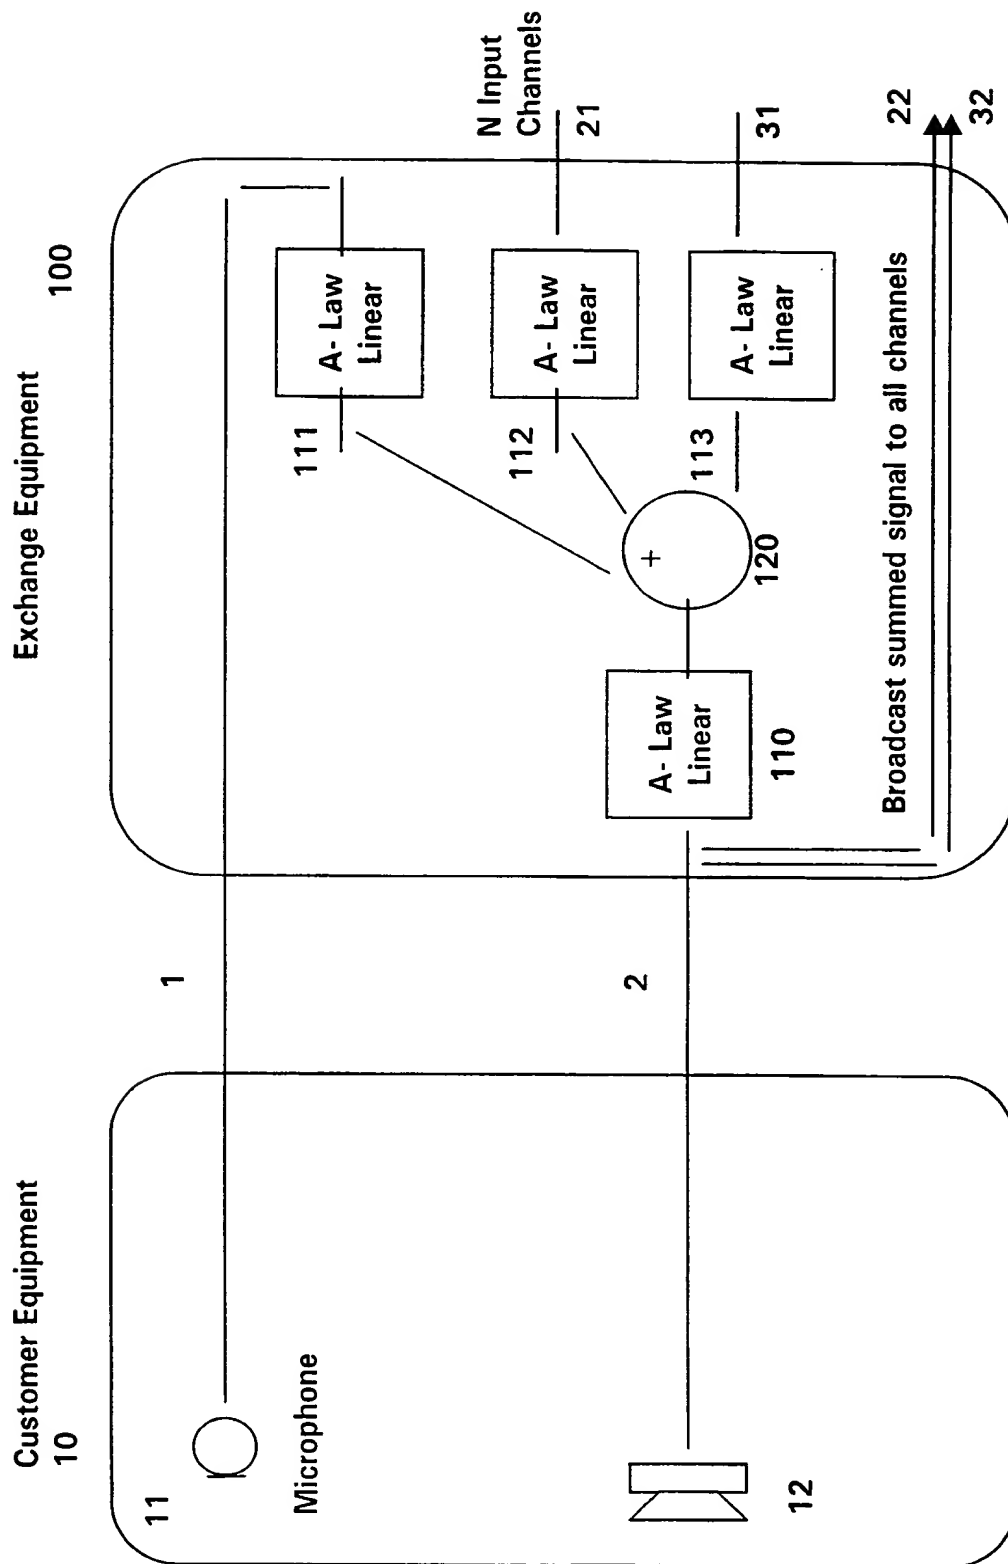


Figure 1

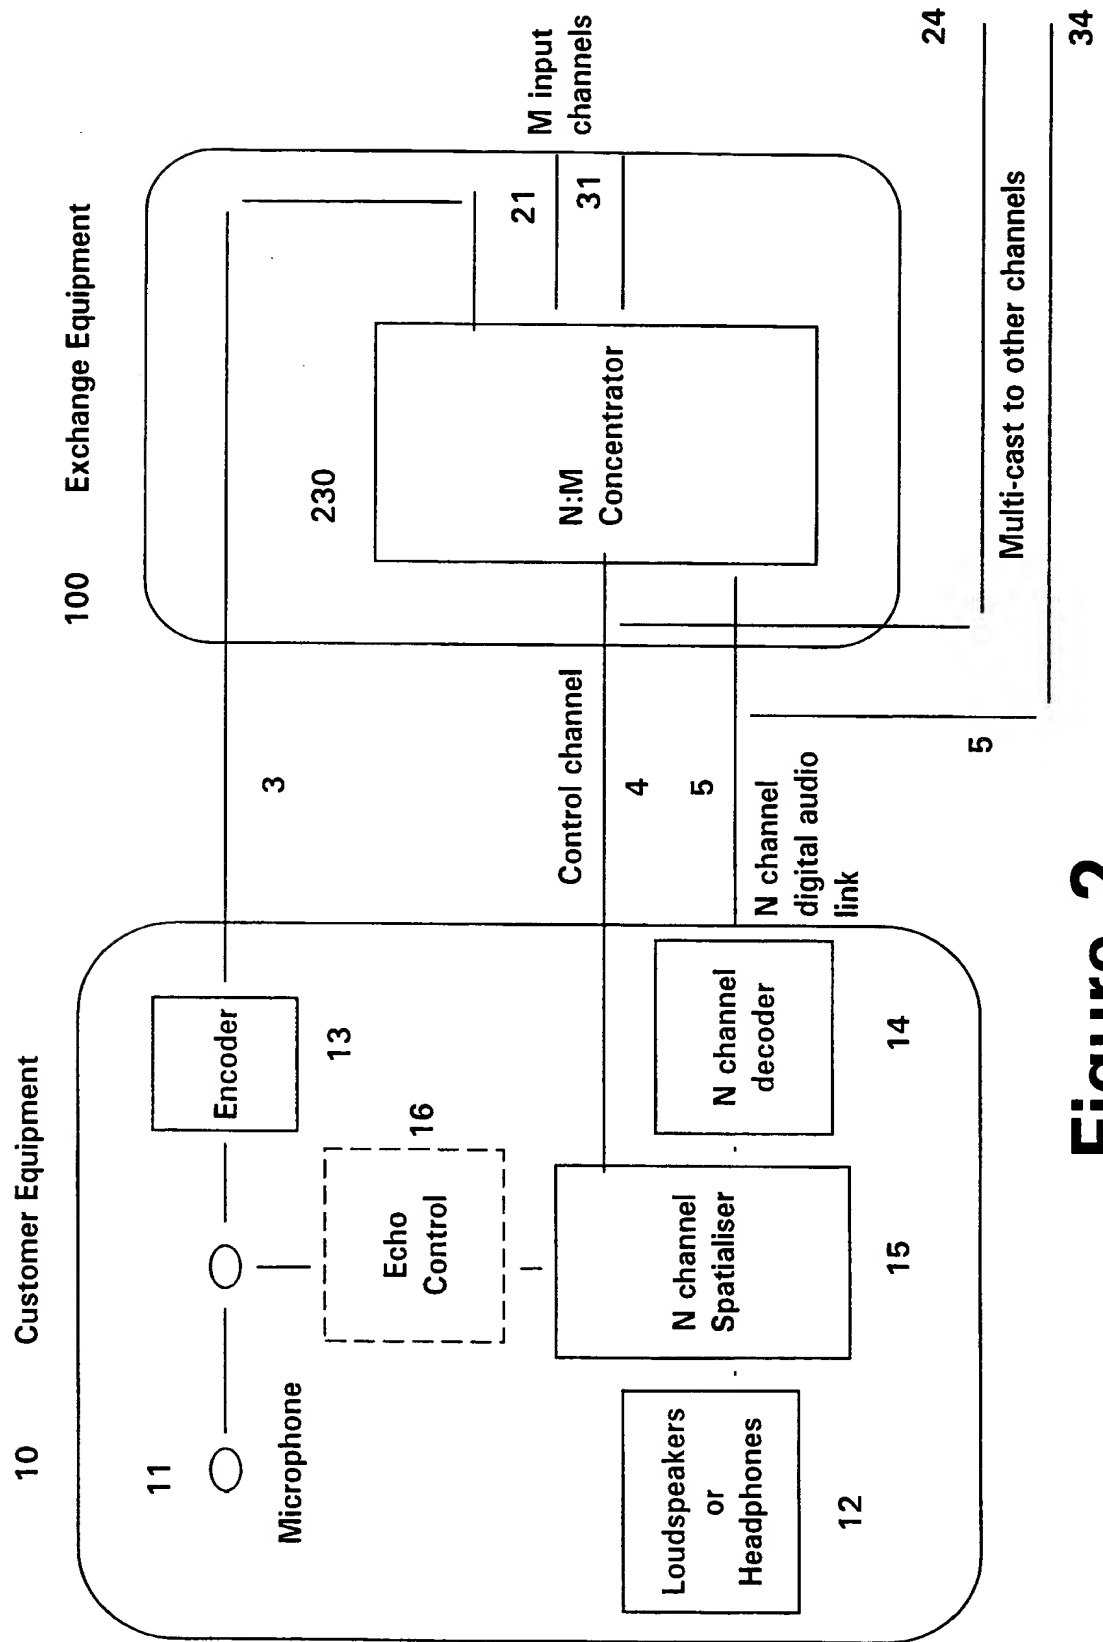


Figure 2

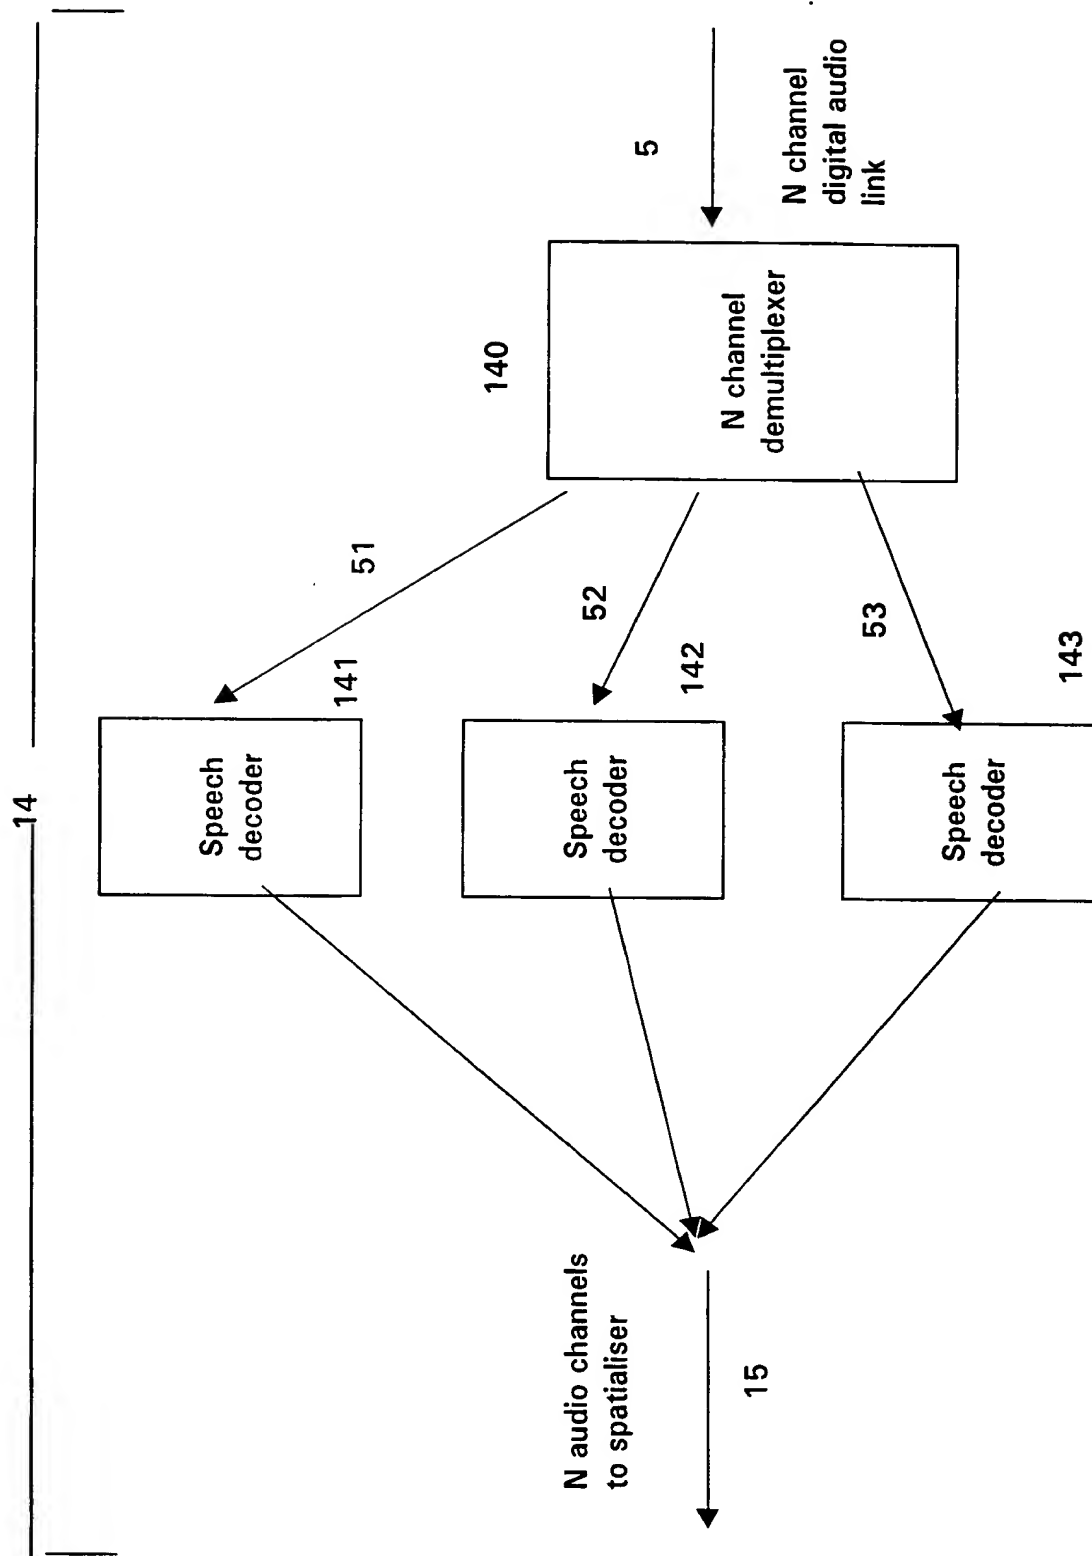


Figure 3

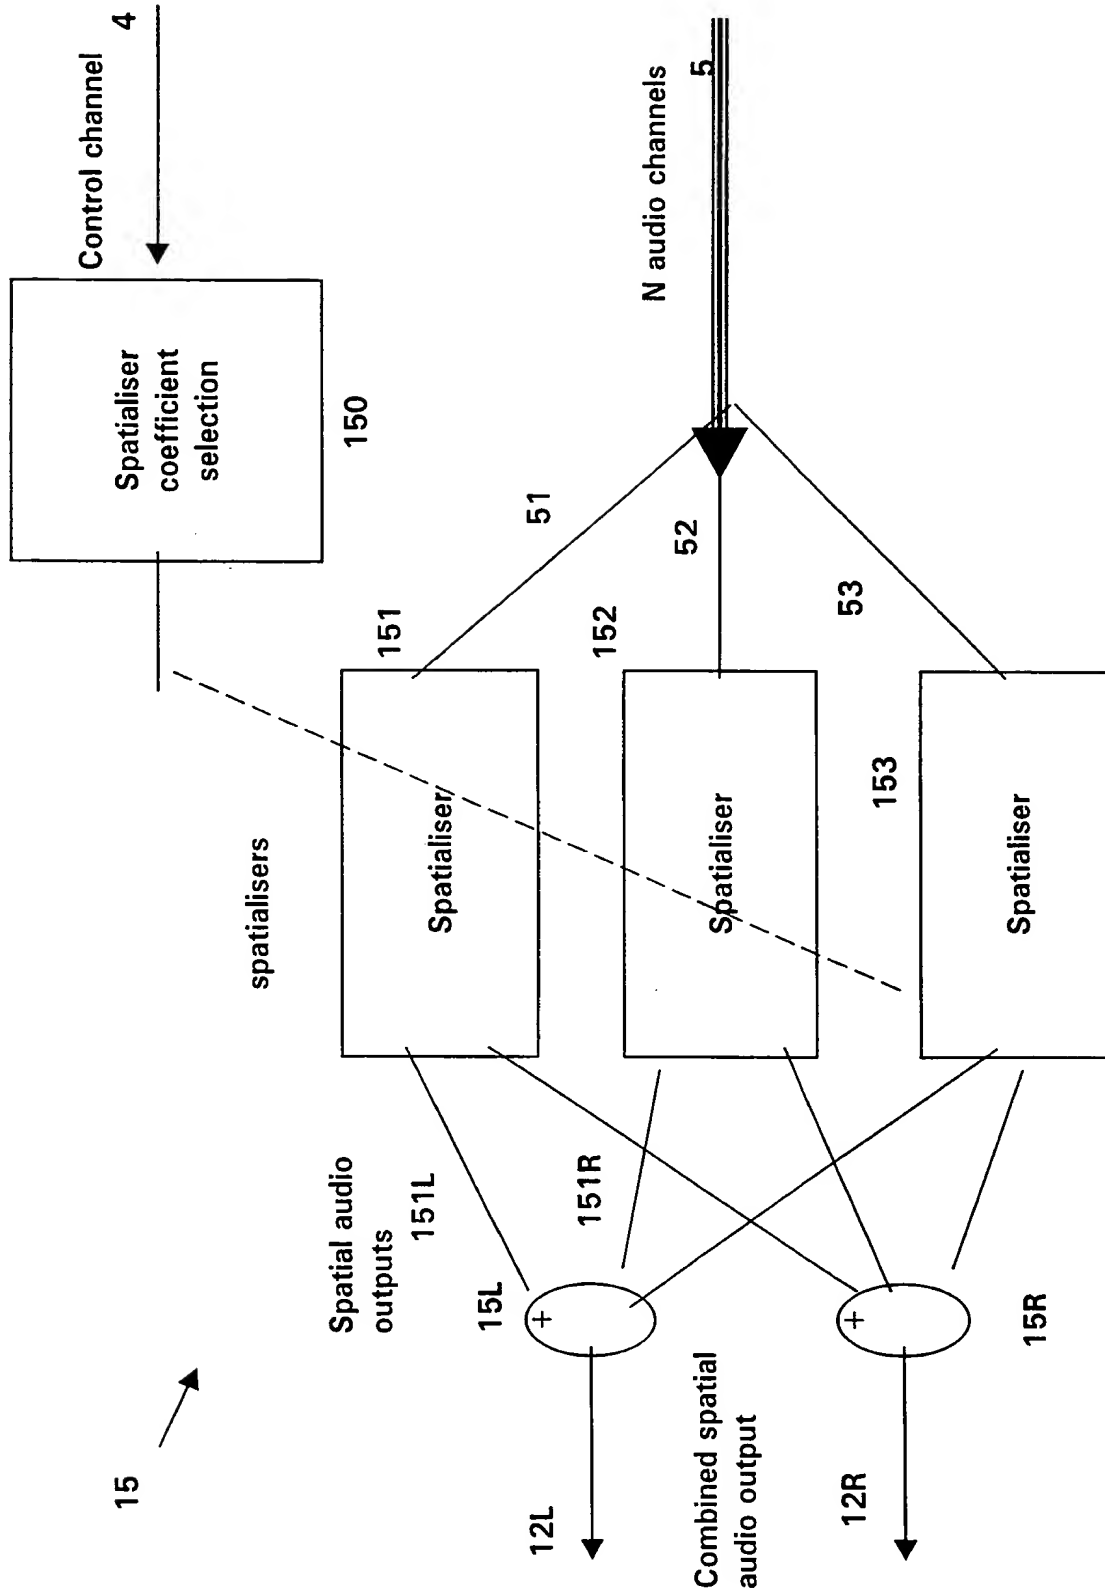


Figure 4

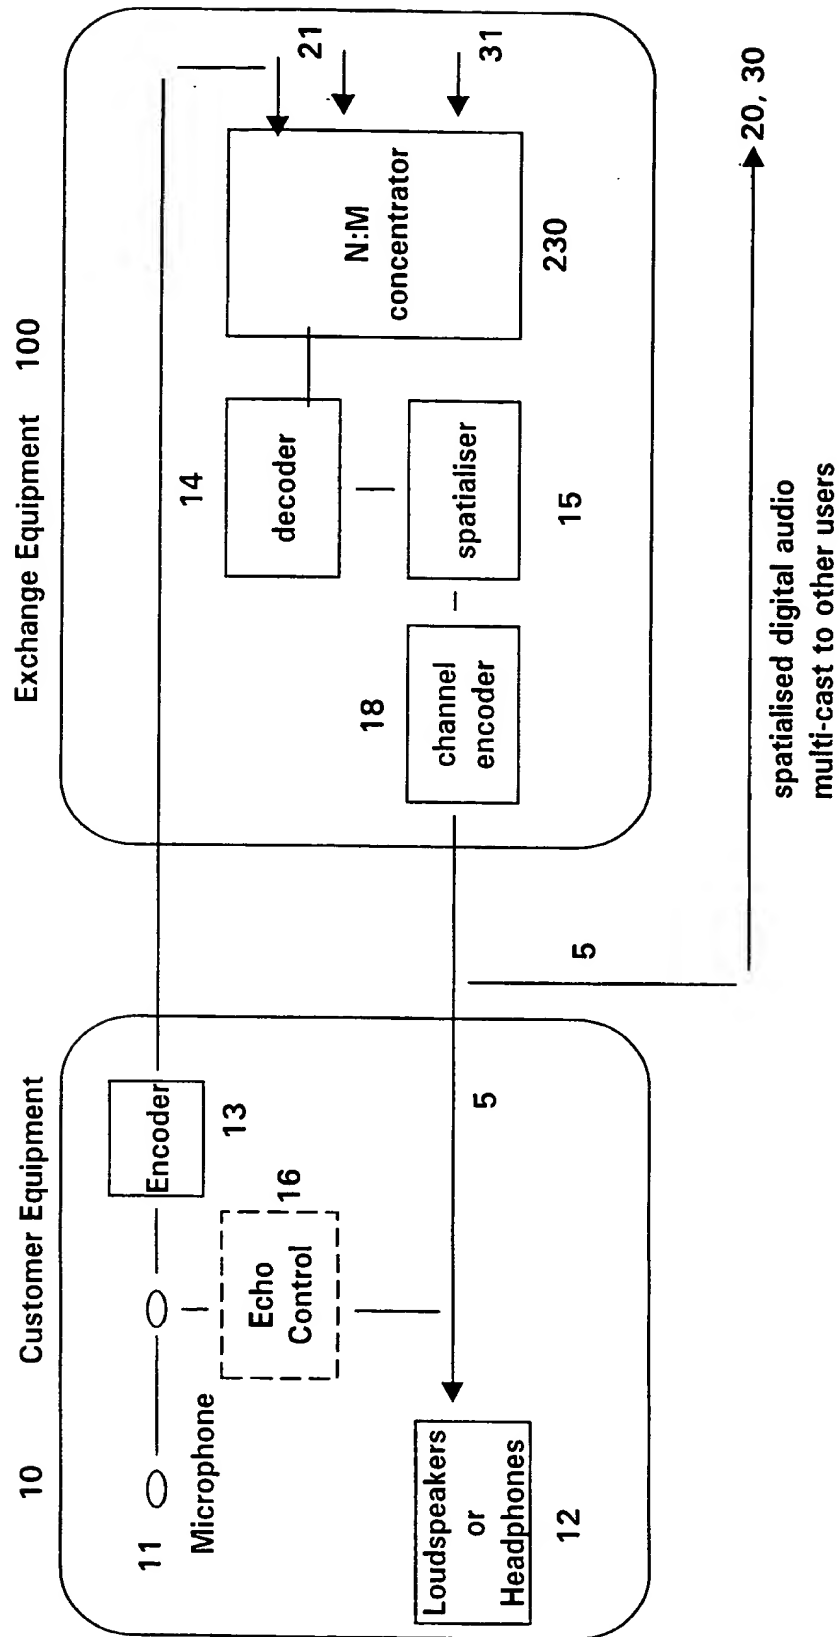


Figure 5

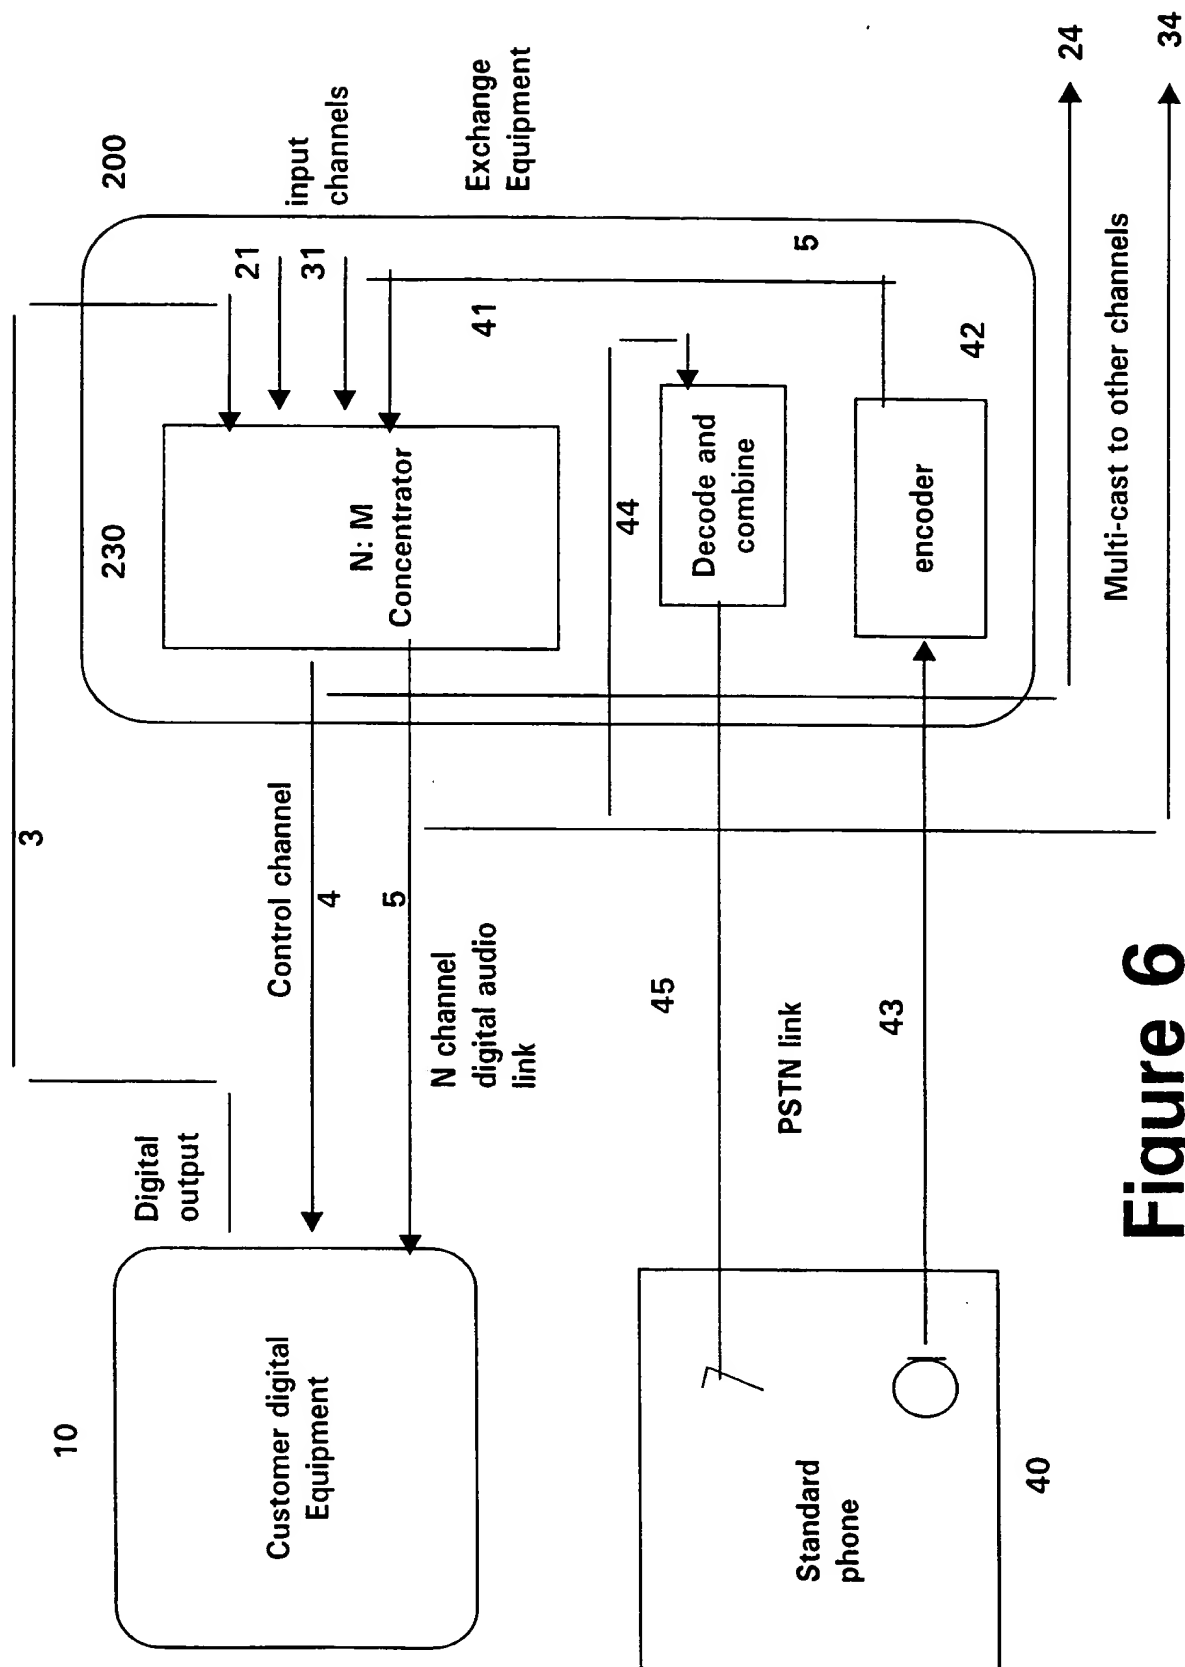


Figure 6

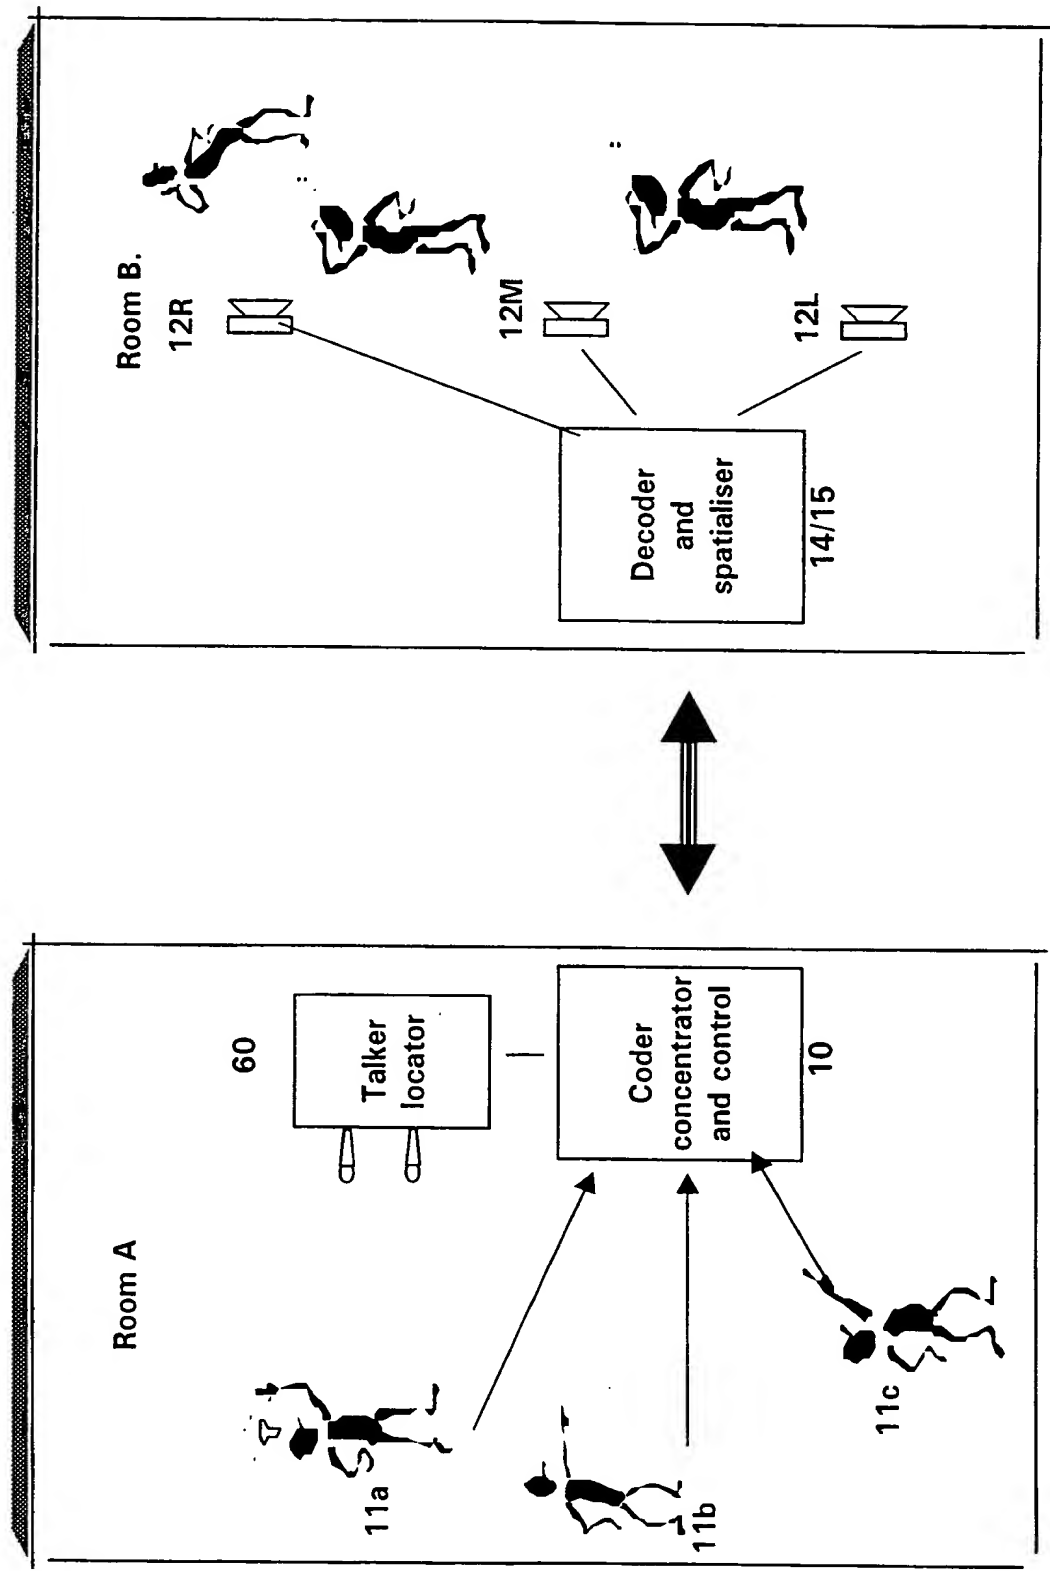


Figure 7

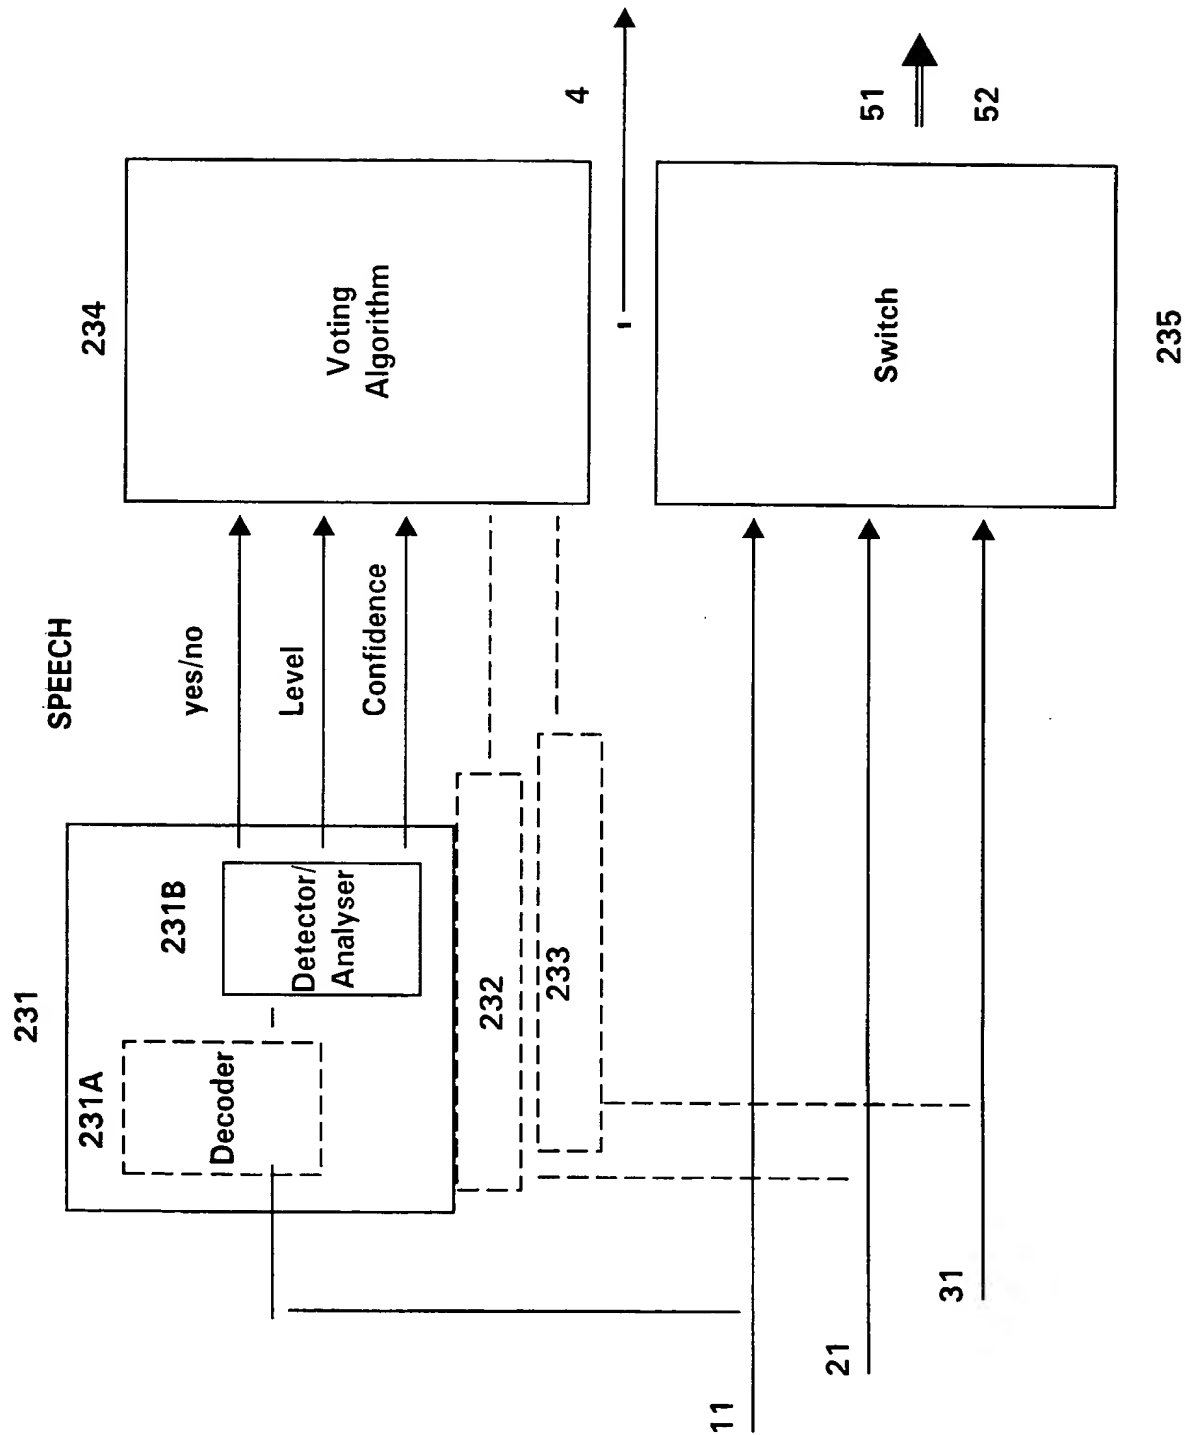


Figure 8

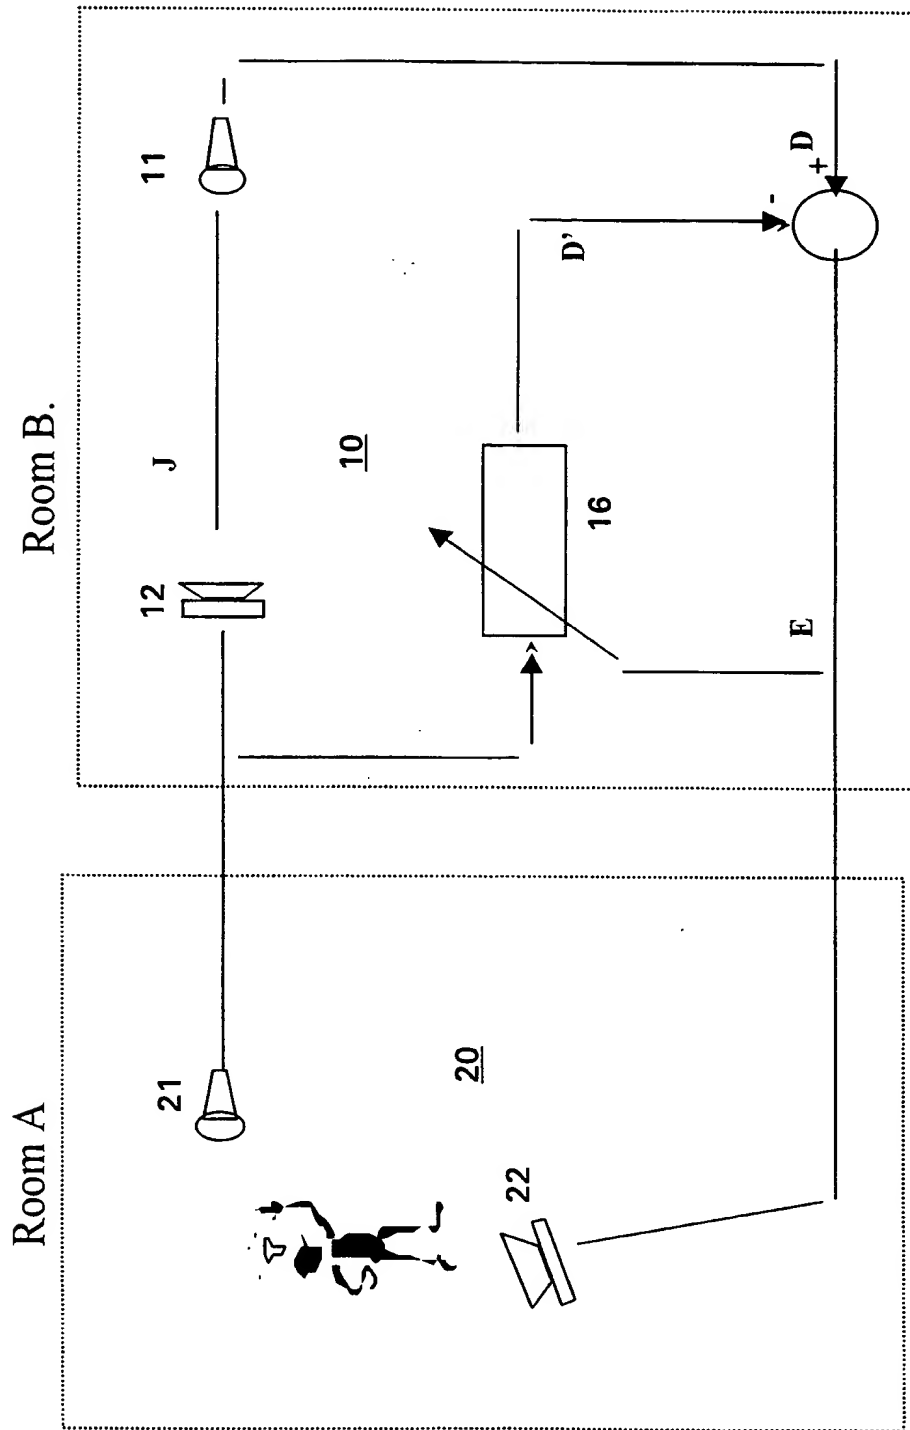
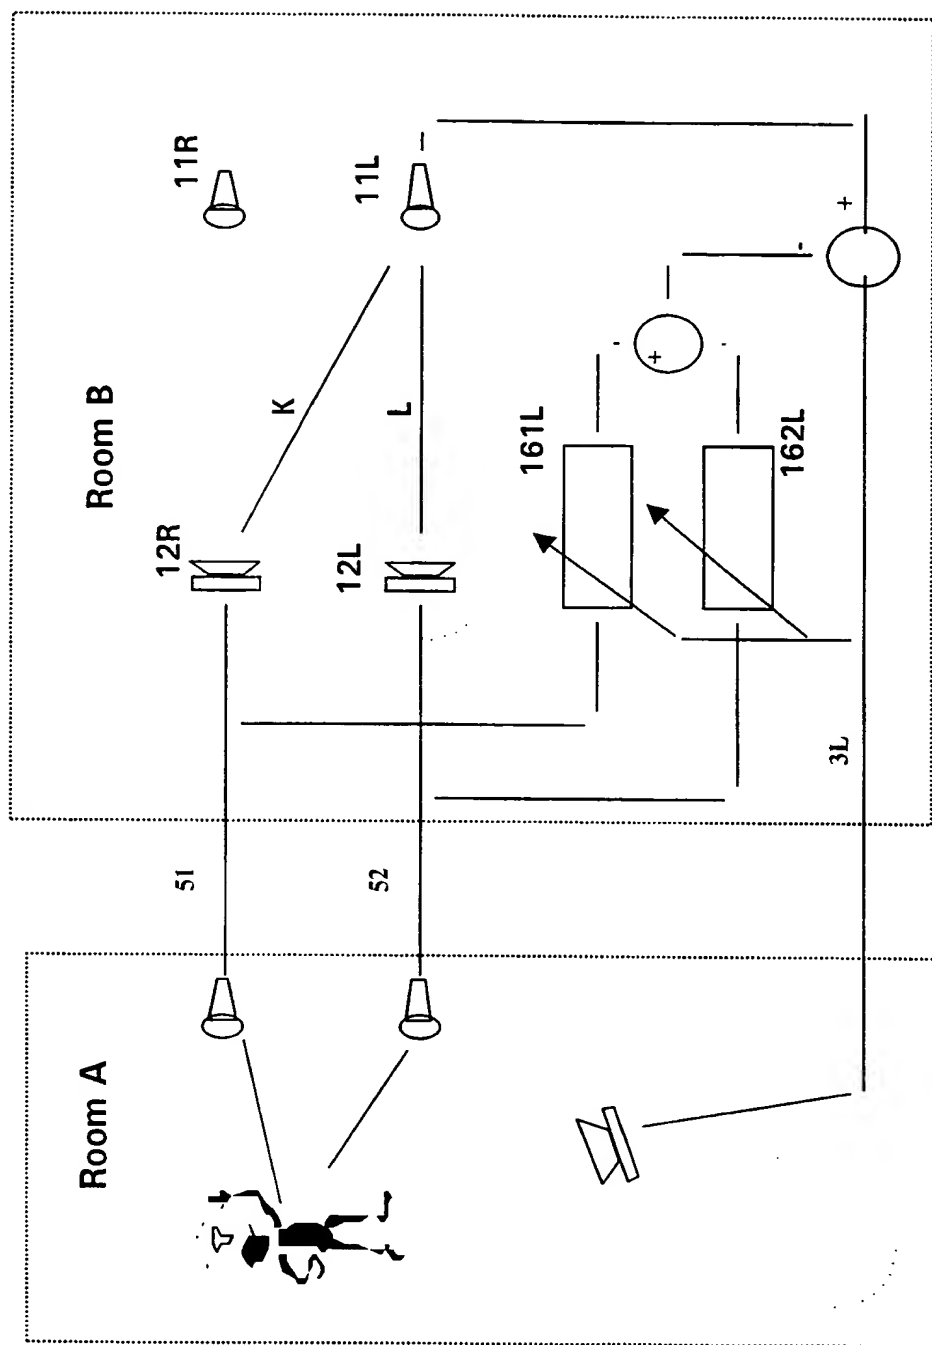


Figure 9

**Figure 10**

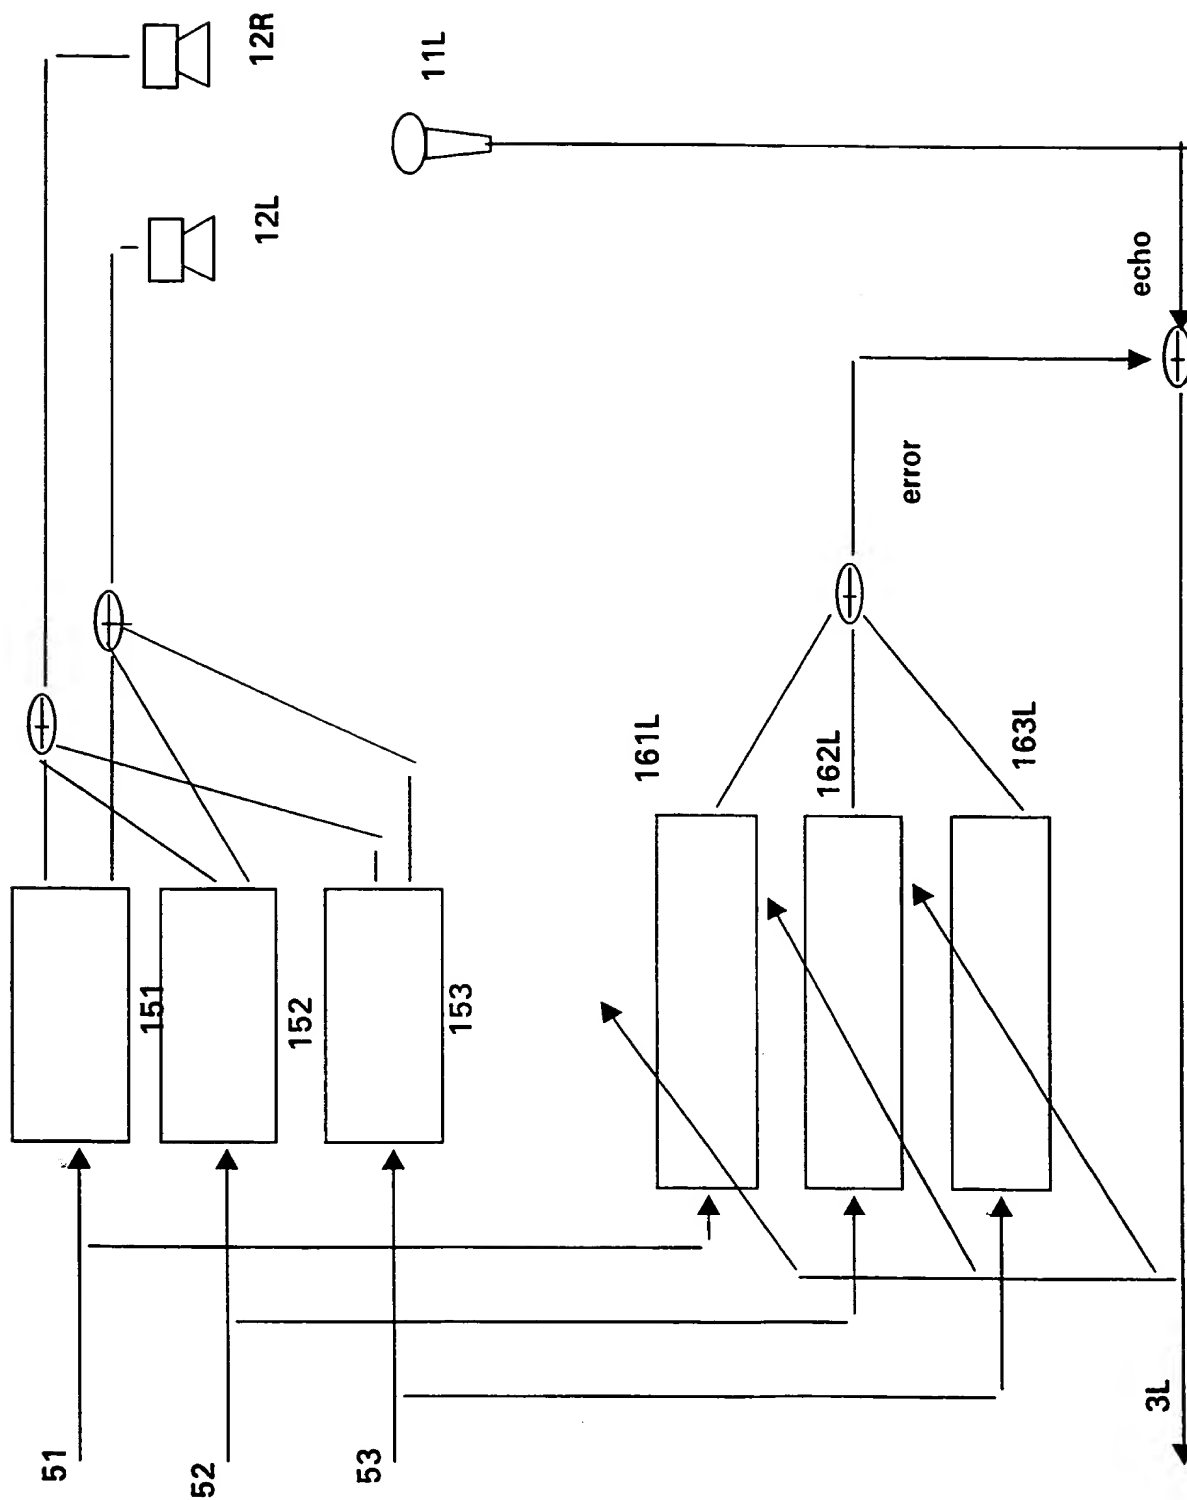


Figure 11

PCT

WIPO

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference A25516/WO	FOR FURTHER ACTION	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
International application No. PCT/GB99/01061	International filing date (day/month/year) 07/04/1999	Priority date (day/month/year) 08/04/1998
International Patent Classification (IPC) or national classification and IPC H04M3/36		
Applicant BRITISH TELECOMMUNICATIONS PUBLIC LIMITED..et.al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.



2. This REPORT consists of a total of 4 sheets, including this cover sheet.

- ☐ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☐ Certain observations on the international application

Date of submission of the demand 11/10/1999	Date of completion of this report 14.07.2000
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Forster, G Telephone No. +49 89 2399 8986 

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/GB99/01061

I. Basis of the report

1. This report has been drawn on the basis of (*substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments.*):

Description, pages:

1-9 as originally filed

Claims, No.:

1-15 as originally filed

Drawings, sheets:

1/11-11/11 as originally filed

2. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
☐ the claims, Nos.:
☐ the drawings, sheets:

3. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

4. Additional observations, if necessary:

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/GB99/01061

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Yes:	Claims	1-15
	No:	Claims	
Inventive step (IS)	Yes:	Claims	1-15
	No:	Claims	
Industrial applicability (IA)	Yes:	Claims	1-15
	No:	Claims	

2. Citations and explanations

see separate sheet

to section V.

1. The present invention relates to a teleconferencing system and a method of providing teleconferencing services, according to the features of the independent claims 1 and 10 respectively.

The closest prior art document appears to be represented by the document EP-A-0 291 470 (first document cited in the international search report) and is acknowledged in the opening part of the description.

2. According to the features of the independent claims the inventive step consists in that the teleconferencing system comprises a conference bridge having a multi-channel connection to each of a plurality of terminal equipments, and at least one terminal equipment having means to separately process each channel to provide a plurality of outputs, each output representing one of the other terminal equipments. The invention provides the means to identify the currently active input channels and to transmit only those active channels over the multi-channel connection, together with control information identifying the transmitted channels.

The underlying concept is not disclosed in or rendered obvious by the cited prior art documents. The subject-matter of the independent claims thus fulfils the requirements of Article 33 PCT.

3. The dependent claims contain further details on the subject-matter of the respective independent claims. These dependent claims merely limit the scope of protection sought by the independent claims and are therefore also considered to fulfil the requirements of Article 33 PCT.